


LITETUBE HC

In pursuit of lighting excellence

SPECIFICATION

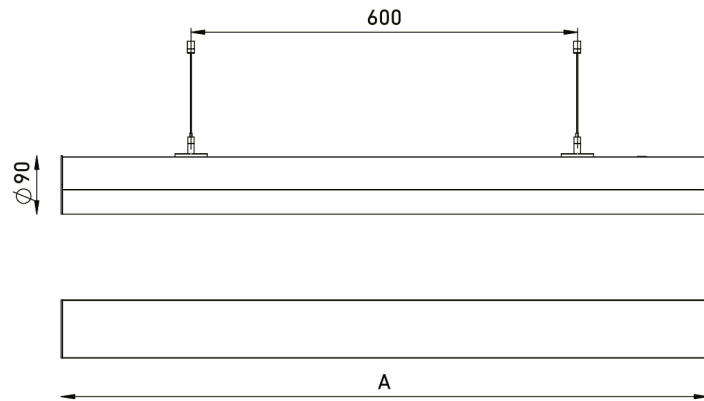

LENGTHS	A (mm)	Mounting Pitch (mm)
1200 mm	1204	1000
2400 mm	2404	2000

- Extruded Polycarbonate diffuser with 180 deg light transmission
- Housing made from extruded aluminium alloy
- Matt Silver Powder coating using Nano Technology
- Pendant mounted luminaire with direct light output
- High efficiency integral driver with necessary safety protections
- Available in Cool White, Neutral White, Warm white & Tunable white color options; CRI>80
- Comes in standard 1200mm and 2400mm lengths

ORDERING DETAILS

PENDANT MOUNT IP 20 240V STD COLOR: Silver

MODEL	Power (W)	Line Current (A)	PF
LITETUBE HC 30W 3000K/4000K/5700K LED LINEAR PENDANT MOUNT LIGHT	30	0.15	>0.95
LITETUBE HC 36W 3000K/4000K/5700K LED LINEAR PENDANT MOUNT LIGHT	36	0.17	>0.95