
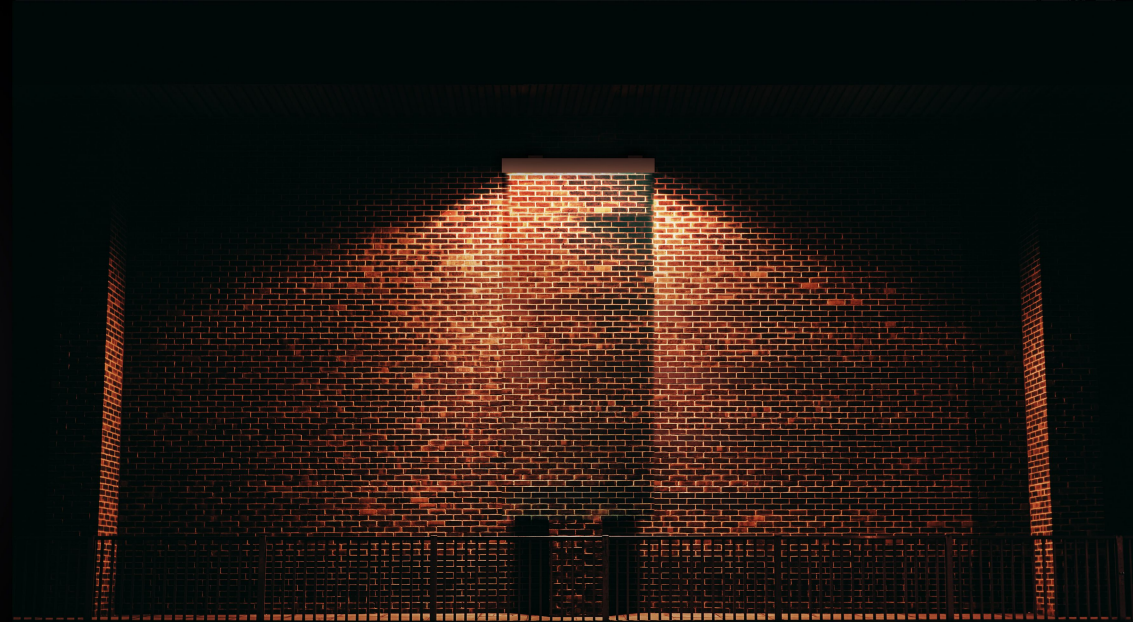


WALL WASHER linear


The name shall suffice !

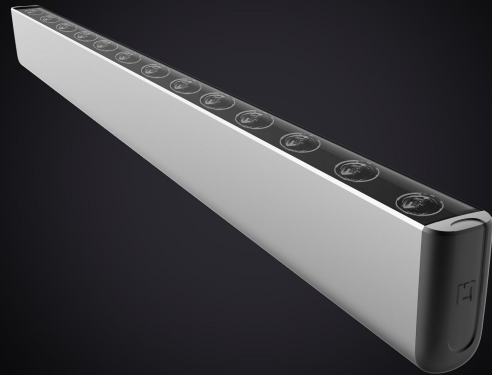

WALL WASHER LINEAR

SPECIFICATION Led Luminaire

- Aluminium Extruded body, corrosion resistance Powder coated
- Toughned glass front cover
- Silicon encapsulated high efficiency isolated integral driver
- Additional external surge protector upto 10KV/5KA
- Comply 50,000 burning hrs as per L70 standard
- IP66 (Dust Tight, Water Tight)
- Options : a. White light b. RGB

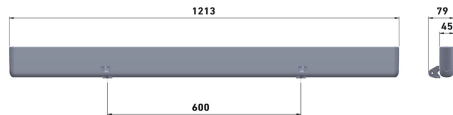

ORDERING DETAILS

LED LUMINAIRE

IP 66 240V Class I Weight <5 Kgs

Ordering Code	Power (W)	Line Current (A)	PF
L010CTF0X0	10	0.04	>0.95
L020CTF0X0	20	0.09	>0.95
L030CTF0X0	30	0.14	>0.95

White : CT = 40 (Neutral White, 5700K) CT = 30 (Warm White, 3000K)
RGB : CT = CR (Red) CT = CG (Green) CT = CB (Blue) CT = RG (RGB)
X = 3 (30° Beam angle) X = 6 (60° Beam angle)

